
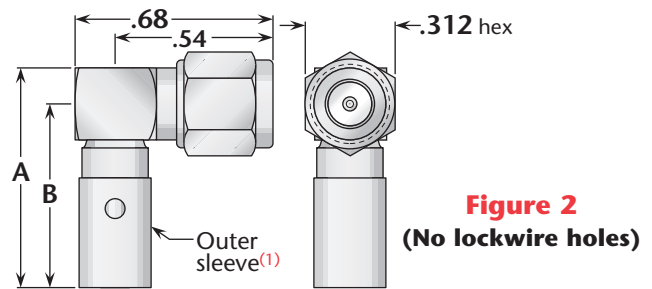




## M39012/56—SMA Right Angle Plug

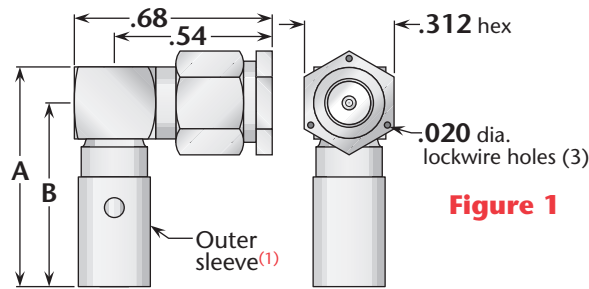

M39012 P/N	Category	Cable Group	Figure	Dimensions		Plating		Assembly Procedure/ Trim Code
				A	B	Body	Contact	
M39012/56-3006	A	I	1	.68	.55	Gold <sup>(2)</sup>	Gold (C)	L / 06
M39012/56-3007	A	II	1	.68	.55	Gold <sup>(2)</sup>	Gold (C)	L / 06
M39012/56-3008	A	IV	1	.76	.63	Gold <sup>(2)</sup>	Gold (C)	L / 01
M39012/56-3009	A	VI	1	.76	.63	Gold <sup>(2)</sup>	Gold (C)	L / 01
M39012/56-3025	C	I	1	.68	.55	Passivated	Gold (C)	L / 06
M39012/56-3026	C	IIA	1	.74	.61	Passivated	Gold (C)	L / 06
M39012/56-3027	C	IV	1	.68	.55	Passivated	Gold (C)	L / 06
M39012/56-3028	C	VIB	1	.69	.56	Passivated	Gold (C)	L / 06
M39012/56-3029	C	VIA	1	.71	.58	Passivated	Gold (C)	L / 06
M39012/56-3030	A	III	1	.68	.55	Gold <sup>(2)</sup>	Gold (C)	L / 06
M39012/56-3106	A	I	2	.68	.55	Gold <sup>(2)</sup>	Gold (C)	L / 06
M39012/56-3107	A	II	2	.68	.55	Gold <sup>(2)</sup>	Gold (C)	L / 06
M39012/56-3108	A	IV	2	.76	.63	Gold <sup>(2)</sup>	Gold (C)	L / 01
M39012/56-3109	A	VI	2	.76	.63	Gold <sup>(2)</sup>	Gold (C)	L / 01
M39012/56-3125	C	I	2	.68	.55	Passivated	Gold (C)	L / 06
M39012/56-3126	C	IIA	2	.74	.61	Passivated	Gold (C)	L / 06
M39012/56-3127	C	IV	2	.68	.55	Passivated	Gold (C)	L / 06
M39012/56-3128	C	VIB	2	.69	.56	Passivated	Gold (C)	L / 06
M39012/56-3129	C	VIA	2	.71	.58	Passivated	Gold (C)	L / 06
M39012/56-3130	A	III	2	.68	.55	Gold <sup>(2)</sup>	Gold (C)	L / 06

<sup>(1)(2)</sup> See page 194 for notes. See page 185 for cable groups and category definitions. Assembly procedures start on page 205. (C) indicates captive contact.

## M39012/57—SMA Straight Jack

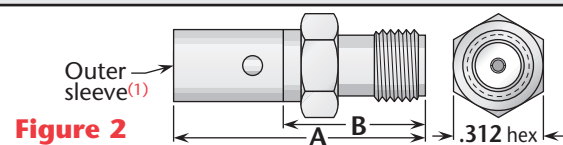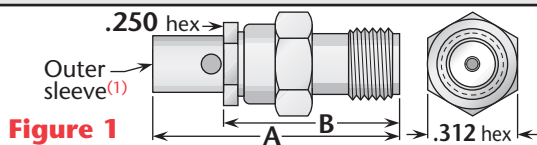

M39012 P/N	Category	Cable Group	Figure	Dimensions		Plating		Assembly Procedure/ Trim Code
				A	B	Body	Contact	
M39012/57-3006	A	I	1	.87	.63	Gold <sup>(2)</sup>	Gold (C)	M / 01
M39012/57-3007	A	II	1	.87	.63	Gold <sup>(2)</sup>	Gold (C)	M / 01
M39012/57-3008	A	IV	2	.90	.53	Gold	Gold (C)	K / 12
M39012/57-3009	A	VI	2	.90	.53	Gold	Gold (C)	K / 12
M39012/57-3025	C	I	1	.87	.63	Passivated	Gold (C)	M / 01
M39012/57-3026	C	IIA	1	.93	.63	Passivated	Gold (C)	M / 01
M39012/57-3027	C	IV	2	.91	.53	Passivated	Gold (C)	K / 12
M39012/57-3028	C	VIB	2	.91	.53	Passivated	Gold (C)	K / 12
M39012/57-3029	C	VIA	2	.93	.53	Passivated	Gold (C)	K / 12
M39012/57-3030	A	III	1	.87	.63	Gold <sup>(2)</sup>	Gold (C)	M / 01

<sup>(1)(2)</sup> See page 196 for notes. See page 185 for cable groups and category definitions. Assembly procedures start on page 205. (C) indicates captive contact.