


M39012/20-0007

SD

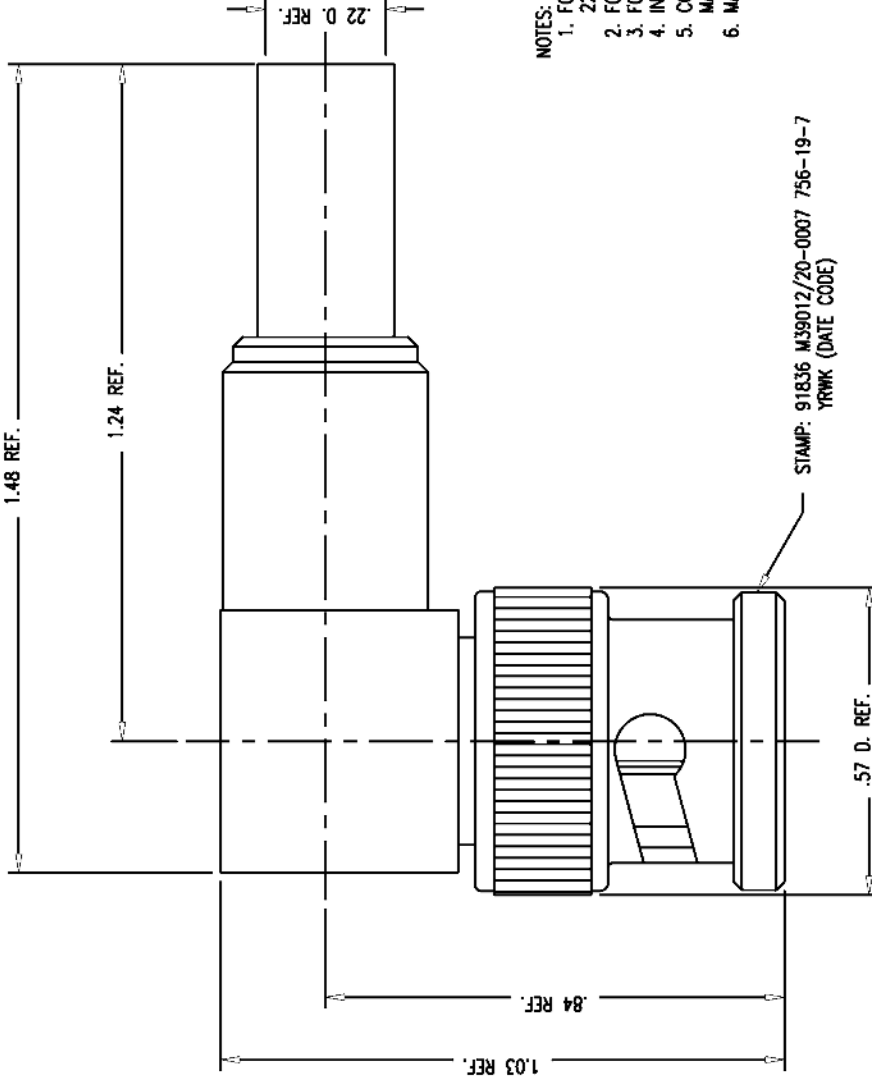

NOTES:

1. FOR USE WITH RG-55, 55A, 55B, 142, 142A, 142B, 223, & 400/U CABLES.
2. FOR CABLING INSTRUCTIONS SEE CP-465.
3. FOR CRIMPING USE DIE KTH-2001.
4. INTERFACE PER MIL-STD-348, FIG. 301-1.
5. CONTACT MUST BE SOLDERED ON RG-55 & 55B/U BUT MAY BE CRIMPED ON BALANCE OF CABLE GROUPS.
6. MATERIALS:  
 INSULATORS: TEFLON, ASTM-D-1457  
 GASKET: SIL. RUB., ZZ-R-765  
 K-GRIP SLEEVE: COM. BRONZE, ASTM-B-135  
 ANGLE CONTACT } BER. COP., ASTM-B-196  
 OUTER CONTACT }  
 ALL OTHER PARTS: BRASS, ASTM-B16
7. FINISHES:  
 CENTER CONTACTS: HARD GOLD P.L.T. PER MIL-G-45204  
 ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
8. ELECTRICAL CHARACTERISTICS:  
 NOMINAL IMPEDANCE: 50 OHMS  
 FREQUENCY RANGE: DC TO 4 GHz.  
 VOLTAGE RATING: 500 VRMS

REVISIONS

ISSUE	CHANGES
0	ER 38018 HMN 05/24/00
1	CN 39089 C HMN 02/24/04

756-19-7 756-19-75R1

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: 2026-29-7

PLUG, ANG, BNC

DRAWN TML	DATE	03/02/00
DESIGN GEH	DATE	03/02/00
APPR.	DATE	

**KINGS**  
 ELECTRONICS CO. INC.  
 ROCK HILL, SOUTH CAROLINA 29730

M39012/20-0007

SD