


GSD

M39012/02-0131

REVISIONS	
ISSUE	CHANGES
2	CN 32243 A LNM 06/01/90

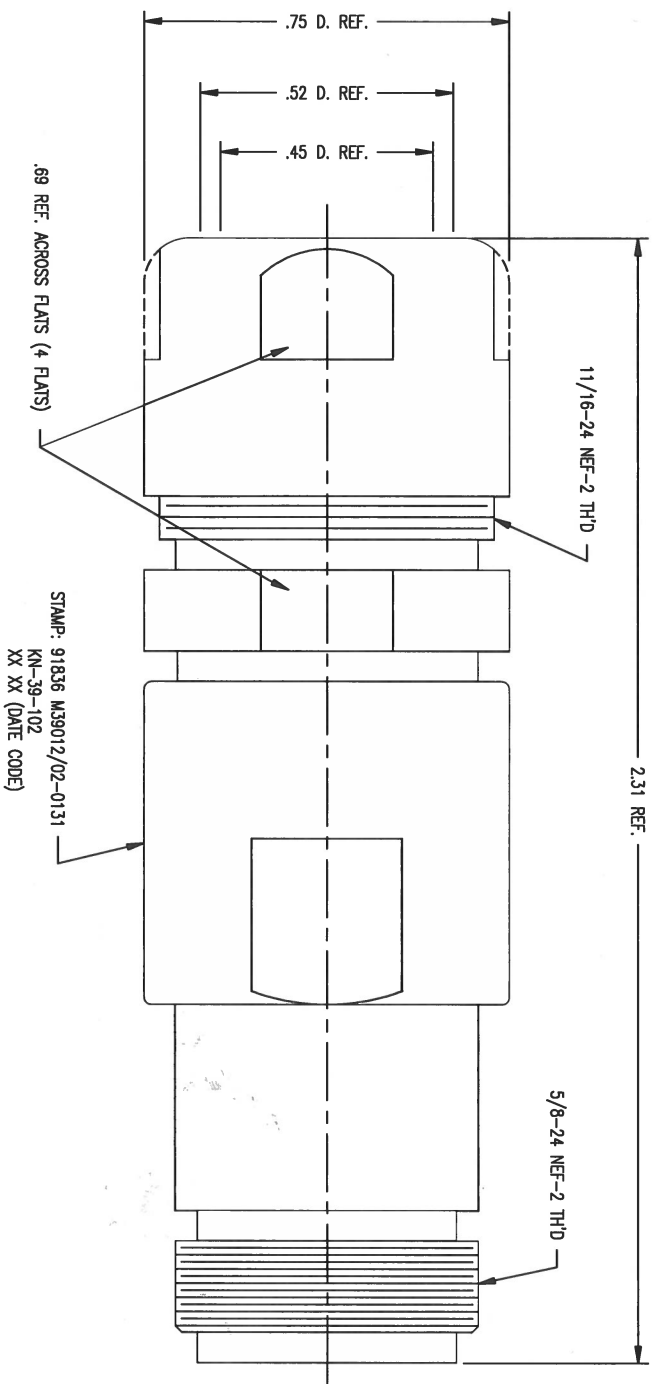

- NOTES:
1. FOR USE WITH RG-215 & 225/U CABLE.
 2. FOR CABLING INSTRUCTIONS SEE CP-1608.
 3. MATERIALS:
INSULATORS: TEFLON, ASTM-D-1457
GASKET: SIL. RUB., ZZ-R-785
CENTER CONTACT: BER. COP., AST-B-296
ALL METAL PARTS: BRASS, ASTM-B-16
 4. FINISHES:
CENTER CONTACT: HARD GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: SILVER PL. PER QQ-S-365
 5. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 1000 VRMS
FREQUENCY RANGE: DC TO 11 GHz

STAMP: 91836 M39012/02-0131
KN-39-102
XX XX (DATE CODE)

GSD

SCALE	4:1
APPROX SURFACE AREA	
KN-39-102	
USED ON	
REF:	JACK, N
DRAWN	JCA
DATE	05/29/92
DESIGN	MAJ
DATE	05/29/92
APPR.	
DATE	
 ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	
M39012/02-0131	